

04-824KR-PCT.

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2005年2月10日 (10.02.2005)

PCT



(10) 国際公開番号
WO 2005/012101 A1

- (51) 国際特許分類: B65B 37/20
(21) 国際出願番号: PCT/JP2004/011268
(22) 国際出願日: 2004年8月5日 (05.08.2004)
(25) 国際出願の言語: 日本語
(26) 国際公開の言語: 日本語
(30) 優先権データ: 特願2003-205992 2003年8月5日 (05.08.2003) JP
(71) 出願人 (米国を除く全ての指定国について): 呉羽化学工業株式会社 (KUREHA CHEMICAL INDUSTRY CO., LTD.) [JP/JP]; 〒1038552 東京都中央区日本橋蛸町1-9-11 Tokyo (JP).
(72) 発明者; および
(75) 発明者/出願人 (米国についてのみ): 橋場 芳次 (HASHIBA, Yoshitugi) [JP/JP]; 〒9748232 福島県いわき市錦町落合135 呉羽テクノメンテ株式会社内 Fukushima (JP). 高橋 仁 (TAKAHASHI, Hitoshi) [JP/JP]; 〒9748686 福島県いわき市錦町落合16 呉羽化学工業株式会社錦工場内 Fukushima (JP). 高橋 栄作 (TAKAHASHI, Eisaku) [JP/JP]; 〒9748686 福島県いわき市錦町落合16 呉羽化学工業株式会社錦工場内 Fukushima (JP).
(74) 代理人: 宮川 貞二, 外 (MIYAGAWA, Teiji et al.); 〒1600005 東京都新宿区愛住町19番地 富士ビル6階 Tokyo (JP).

[続葉有]

(54) Title: DEVICE AND METHOD FOR MEASURING HARD GRANULAR OBJECTS

(54) 発明の名称: 硬質粒状物の計量装置及び計量方法

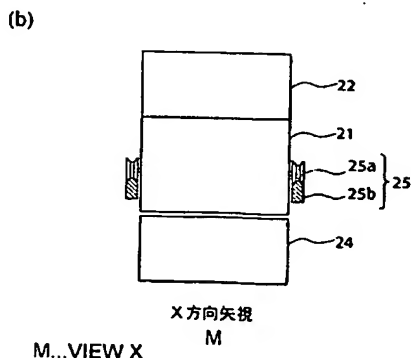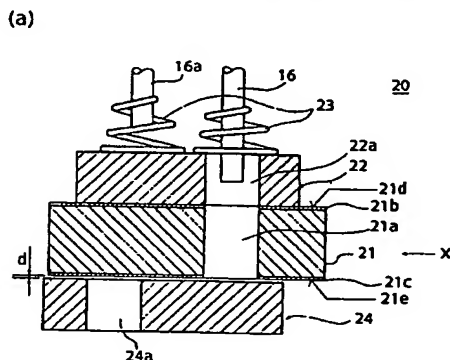

M...VIEW X

(57) Abstract: A device and a method for measuring hard granular objects are provided, where the device is not damaged by grains caught between a measure cup and a holder or a shutter even in measurement of granular objects with high hardness. With the device and the method, the measurement is made after removing fine powder from hard granular objects that are typified by granular adsorption charcoal and in which the fine powder is mixed. A measuring device (20) for hard granular objects has a measure cup (21), a holder (22) for hard granular objects has a measure cup (21), a holder (22), a shutter (24), and pressing means (23). The measure cup (21) has a first plane (21d) and a second plane (21e) parallel to the first plane (21d), and has a space (21a) into which the hard granular objects are sent from the first plane (21d) side and that is formed so as to penetrate between the first plane (21d) and the second plane (21e). The holder (22) is positioned on the first plane (21d) side, has a through hole (22a) formed so as to communicate with the space (21a), and slides against the first plane (21d). The shutter (24) is positioned on the second plane (21e) side, has a through-hole (24a) communicating with the space (21a), and moves parallel to the second plane (21e). The pressing means (23) presses the holder (22) toward the measure cup (21).

(57) 要約: 硬度の高い粒状物を計量しても、計量杯とホルダーあるいはシャッターとの間に挟まる粒により損傷を受けることがない、硬質粒状物の計量装置及び計量方法を提供する。また、粒状吸着炭に代表される硬質粒状物であって、微粉が混入するものから、微粉を除去して計量する計量装置及び計量方法を提供する。硬質粒状物の計量装置20は、第1の平面21dと第1の平面21dに平行な第2の平面21eを有し、第1の平面21dの側から硬質粒状物を送り込まれる空間21aが第1の平面21dと第2の平面21eとの間を貫通して空間21aと連通する貫通穴22aが形成され、第1の平面21dと摺動するホルダー22と、第2の平面21eの側位置し、空間21aと連通する貫通穴24a

[続葉有]

WO 2005/012101 A1



(81) 指定国(表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

KG, KZ, MD, RU, TJ, TM), ヨーロッパ(AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

添付公開書類:
— 国際調査報告書

(84) 指定国(表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY,

2文字コード及び他の略語については、定期発行される各PCTガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/011268

A. CLASSIFICATION OF SUBJECT MATTER
Int.Cl.⁷ B65B37/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ B65B37/20, B65B35/46, B65B1/06, B65B1/36

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1940-1996 Toroku Jitsuyo Shinan Koho 1994-2004

Kokai Jitsuyo Shinan Koho 1971-2004 Jitsuyo Shinan Toroku Koho 1996-2004

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 5-305901 A (Kabushiki Kaisha Iwakuro Seisakusho), 19 November, 1993 (19.11.93), Full text; Fig. 4 (Family: none)	1-9
A	JP 2002-136574 A (Yuyama Mfg. Co., Ltd.), 14 May, 2002 (14.05.02), Par. No. [0021]; Fig. 2 (Family: none)	1-9
A	JP 8-34401 A (Kansai Koso Kabushiki Kaisha), 06 February, 1996 (06.02.96), Full text; Figs. 9 to 11 (Family: none)	1-9

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
01 November, 2004 (01.11.04)Date of mailing of the international search report
16 November, 2004 (16.11.04)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

DESCRIPTION

DEVICE AND METHOD FOR MEASURING HARD GRANULAR OBJECT

Technical Field

5 [0001]

The present invention relates to a device and a method for measuring a hard granular object, and, in particular, to a device and a method for measuring a hard granular object into which fine granules not to be measured are or have been mixed
10 during the measurement process or before. The present invention also relates to a device for measuring a hard granular object which would not be damaged by such fine granules and a method for measuring a hard granular object therewith.

15 Background Art

[0002]

Conventionally, measuring vessels have been used to measure a granular object such as powdery or granular medicine. As shown in FIG. 4, a measuring vessel 1 is a rectangular
20 parallelepiped made of stainless steel and having a space with a capacity equal to the volume of the granular object to be measured. A holder 2 also made of stainless steel is placed on the measuring vessel 1. The holder 2 has a through hole communicable with the space of the measuring vessel 1. The
25 granular object is fed into the through hole and, when the through hole of the holder 2 is communicated with the space of the measuring vessel 1, the space of the measuring vessel 1 can be filled with the granular object.

[0003]

30 A shutter 4 is disposed under the measuring vessel 1. The

shutter 4 also has a through hole communicable with the space of the measuring vessel 1. In the configuration, when the through hole of the shutter 4 is communicated with the space of the measuring vessel 1, the granular object filling up the space of the measuring vessel 1 falls through the through hole of the shutter 4. Thereupon, the measuring vessel 1 reciprocates horizontally, and a step of communicating the space of the measuring vessel 1 with the through hole of the holder 2 so that the space of the measuring vessel 1 is filled with the granular object and a step of communicating the space of the measuring vessel 1 with the through hole of the shutter 4 so that the granular object filling up the space of the measuring vessel 1 falls through the through hole of the shutter 4 are performed alternately and repeatedly.

15 [0004]

When granular object which has high hardness, such as spherical adsorptive carbon, or which contains fine granules or generates fine granules during processing, is measured, the fine granules are caught between the measuring vessel 1 and the holder 2 or the shutter 4 as the measuring vessel 1 slides relatively on the holder 2 or the shutter 4, causing a damage to the measuring vessel 1, the holder 2, and/or shutter 4. Also, since the measuring vessel 1 slides on the holder 2 and the shutter 4, the contact surfaces thereof are subjected to abrasion. Therefore, a spare measuring vessel and so on for replacement must be prepared so that the measuring vessel and so on can be replaced when damaged.

Disclosure of the Invention

30 Problem to be Solved by the Invention

[0005]

However, since the parts, especially the measuring vessel, are machined with high precision, it is not desirable from the viewpoint of operating efficiency and economic efficiency to replace them every time they are damaged. It is, therefore, an object of the present invention to provide a device for measuring a hard granular object having a measuring vessel, a holder, and a shutter which are not damaged by a granule caught between them when used to measure a granular object with high hardness and to provide a method for measuring hard a granular object therewith. Another object of the present invention is to provide a device and a method for measuring a hard granular object such as spherical adsorptive carbon, which may contain fine granules, with removing fine granules from the hard granular object.

Means for Solving the Problem

[0006]

In accomplishing the above objects, a device 20 for a measuring hard granular object according to the present invention comprises: a measuring vessel 21 having a first face 21d, a second face 21e parallel to the first face 21d, and a space 21a formed between the first face 21d and the second face 21e for receiving a hard granular object supplied from the first face 21d side; a holder 22 located on the side of the first face 21d, having a through hole 22a communicable with the space 21a, and slidable along the first face 21d; a shutter 24 located on the side of the second face 21e, having a through hole 24a communicable with the space 21a, and movable parallel to the second face 21e; and a pressing means 23 for pressing the holder

22 toward the measuring vessel 21.

[0007]

In this configuration, since the holder is pressed toward the measuring vessel and the first face of the measuring vessel and
5 a face of the holder are kept in close contact with each other, the granular object is less likely to be caught between the faces to cause damage to the measuring vessel and the holder. The faces are flat to the extent that the measuring vessel and the holder can slide along each other as described above. The first
10 face and second face of the measuring vessel are not necessarily precisely parallel but are parallel to the extent that the measuring vessel can slide along the face of the holder and move in parallel to a face of the shutter. The hard granular object is a granular object which is so hard that it can scratch or
15 damage the holder, the measuring vessel, and/or the shutter when caught between the holder and the measuring vessel or between the measuring vessel and the shutter.

[0008]

In a device for measuring a hard granular object according
20 to the present invention, as shown in FIG. 1 for example, in the described device 20, there may be kept a designated gap d between the second face 21e and the shutter 24.

[0009]

In this configuration, since there is a designated gap between
25 the second face of the measuring vessel and the shutter, fine granules in the granular object can be removed from the space of the measuring vessel and the measuring vessel and shutter can move easily relative to each other. Here, the designated gap is a gap with a width smaller than the diameter of the hard
30 granular object to be measured and greater than the diameter

of the fine granules not to be measured.

[0010]

In a device for measuring a hard granular object according to the present invention, for example as shown in FIG. 1, in
5 any device 20 described above, the holder 22 may be pressed toward the measuring vessel 21 with a force smaller than that required to crush the hard granular object.

[0011]

In this configuration, even if a hard granular object is caught
10 between the holder and the measuring vessel, the hard granular object is not crushed and therefore a large amount of fine granules are not generated.

[0012]

In a device 20 for measuring a hard granular object according
15 to the present invention, for example as shown in FIG. 1, in any device 20 described above, a part of the first face 21d which slides on the holder 21 may be made of an abrasion resistant material 21b.

[0013]

20 In this configuration, since the face of the measuring vessel which slides on the holder is made of an abrasion resistant material, the measuring vessel is not likely worn down when sliding on the holder.

[0014]

25 In a device 20 for measuring a hard granular object according to the present invention, for example as shown in FIG. 1, in any device 20 described above, a part of the holder 22 which slides on the measuring vessel 21 may be made of an acetal resin or polyether-ether-ketone.

30 [0015]

In this configuration, since the holder is made of a soft material, the holder can be kept in close contact with the first face of the measuring vessel and the granular object is less likely to be caught between them. And, since the holder is made of a slippery material, the measuring vessel and the holder can move easily relative to each other. In addition, since the holder is made of an acetal resin or polyether-ether-ketone, it is easy to be formed and to be replaced when worn down.

[0016]

10 In a device 20 for measuring a hard granular object according to the present invention, for example as shown in FIG. 1, in any device 20 described above, a part of the second face 21e facing the shutter may be made of an abrasion resistant material 21c.

15 [0017]

In this configuration, since the second face of the measuring vessel is formed of an abrasion resistant material, the measuring vessel is less likely to be worn down or damaged by the discharged fine granules when the measuring vessel and the shutter move relative to each other.

[0018]

In a device 20 for measuring a hard granular object according to the present invention, for example as shown in FIG. 1, in any device 20 described above, the space 21a of the measuring vessel 21 for receiving the hard granular object may have an opening with its unchamfered edge in the first face 21d.

[0019]

In this configuration, the hard granular object is less likely to be caught between the holder and the measuring vessel.

30 [0020]

In a device 20 for measuring a hard granular object according to the present invention, for example as shown in FIG. 1, in any device 20 described above, the space 21a of the measuring vessel 21 for receiving the hard granular objects may have an opening with its unchamfered edge in the second face 21e.

[0021]

In this configuration, the hard granular object is less likely to be caught between the measuring vessel and the shutter.

[0022]

10 In order to achieve the above objects, as shown in FIG. 2 for example, a method for measuring a hard granular object according to the present invention, comprises steps of: charging the space 21a of the measuring vessel 21 with a hard granular object to be measured from a holder 22 of any one of the above measuring
15 device (see FIG. 2A); closing the openings of the space in the first and second faces of the measuring vessel 21, filled with the hard granular object (see FIG. 2B); and discharging the hard granular object from the space 21a of the measuring vessel 21 (see FIG. 2C).

20 [0023]

In this configuration, there can be obtained a method for measuring a hard granular object which does not cause hard granular object to be caught between the measuring vessel and the holder or the shutter to damage the measuring vessel, the
25 holder, and/or the shutter. Also, there can be obtained a measuring method with which fine granules not to be measured can be removed.

[0024]

The basic Japanese Patent Application No. 2003-205992 filed
30 on August 5, 2003 is hereby incorporated in its entirety by

reference into the present application.

The present invention will become more fully understood from the detailed description given hereinbelow. However, the detailed description and the specific embodiment are

5 illustrated of desired embodiments of the present invention and are described only for the purpose of explanation. Various changes and modifications will be apparent to those ordinary skilled in the art within the spirit and scope of the present invention on the basis of the detailed description.

10 The applicant has no intention to give to public any disclosed embodiments. Among the disclosed changes and modifications, those which may not literally fall within the scope of the present claims constitute, therefore, a part of the present invention in the sense of doctrine of equivalents.

15 The use of the terms "a" and "an" and "the" and similar referents in the specification and claims are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., "such as")
20 provided herein, is intended merely to better illuminate the invention and does not pose a limitation on the scope of the invention unless otherwise claimed.

Effects of the Invention

25 [0025]

As described previously, utilizing the device and method for measuring a hard granular object according to the present invention, it is possible to measure a hard granular object without allowing fine granules to mix in the measured hard
30 granular object even when the hard granular object contains fine

granules or generates fine granules during processing. Also, since the measuring device is less likely to be damaged by fine granules, the measuring device and measuring method is particularly suitable for use in measuring a hard granular
5 object containing fine granules.

Best Mode for Carrying Out the Invention

[0026]

The embodiments of the present invention are hereinafter
10 described with reference to the drawings. The same or corresponding devices are denoted in all the drawings with the same reference numerals, and the repeated description is omitted.

[0027]

15 A device for measuring spherical adsorptive carbon according to a first embodiment of the present invention is described with reference to the cross-sectional view of FIG. 1. A measuring vessel 21 is a metal rectangular parallelepiped which has a space 21a having a capacity corresponding to the volume of
20 spherical adsorptive carbon to be measured and opening in two parallel opposing faces 21d and 21e of the measuring vessel 21. The measuring vessel 21 is placed such that the space 21a opens vertically with the face 21d up. The space 21a preferably has a circular cylindrical shape so that it can be easily formed,
25 but may be of another shape. The measuring vessel 21 may be in the form of a circular or oval plate or may be of another shape as long as it has the two parallel faces 21d and 21e where a space has its opening. The measuring vessel 21 is preferably made of stainless steel so that it can be less likely to be
30 damaged by spherical adsorptive carbon but may be made of

another metal. Alternatively, the measuring vessel 21 may be made of, for example, an engineering plastic resin as a hard material other than metals because it is hard and light.

[0028]

5 The top face of the measuring vessel 21 is formed by a thin plate 21b of ceramic as an abrasion resistant material. The thin plate 21b may be made of an abrasion resistant material other than ceramic. Alternatively, an abrasion resistant material may be coated on the surface. The thin plate 21b may
10 be formed over the entire surface of the top face of the measuring vessel 21 or over only a part of the top face of the measuring vessel 21 on which a holder 22 slides, which is described later. The upper opening of the space 21a has an unchamfered, right-angle edge. When the measuring vessel 21 is made of a
15 hard material such as stainless steel, the measuring vessel 21 may not be provided with the thin plate 21b as an abrasion resistant material and have a surface formed of stainless steel.

[0029]

A part of the bottom face of the measuring vessel 21 facing
20 a shutter 24, which is described later, is formed by a thin plate 21c of ceramic as an abrasion resistant material. The thin plate 21c may be made of an abrasion resistant material other than ceramic. Alternatively, an abrasion resistant material may be coated on the surface. A part of the bottom face of the
25 measuring vessel 21 not facing the shutter 24 may be formed by a material with abrasion resistance or a material without abrasion resistance. For example, the part facing the shutter 24 is made of a laminate of an abrasion resistant material. The thinplate 21c may be formed over the entire surface of the bottom
30 face of the measuring vessel 21 or over only a part of the bottom

face of the measuring vessel 21 on which the shutter 24 slides ,
which is described later. The lower opening of the space 21a
has an unchamfered, right-angle edge. When the measuring
vessel 21 is made of a hard material such as stainless steel,
5 the measuring vessel 21 may not be provided with the thin plate
21c of an abrasion resistant material and have a surface formed
of stainless steel.

[0030]

The measuring vessel 21 is, as shown in a view taken in the
10 direction of arrow X in FIG. 1, horizontally movable by wheels
25a attached thereto and fixed rails 25b. The measuring vessel
21 is driven by an actuator (not shown) and reciprocates
horizontally. The supporting method for allowing the
horizontal movement of the measuring vessel 21 may be by other
15 means such as a linear guide or a linear bearing.

[0031]

A holder 22 is placed on the top face 21d of the measuring
vessel 21. The holder 22 is a rectangular parallelepiped, and
a part of the holder 22 which slides on the measuring vessel
20 21 is made of an acetal resin or polyether-ether-ketone. A
material other than acetal resin or polyether-ether-ketone can
be suitably used as long as it has high hardness, high abrasion
resistance and a low friction coefficient. Examples of
materials with high abrasion resistance include polyphenylene
25 sulfide resins, polyamide-imide resins, polyarylate resins,
polyethersulfone resins, polyimide resins, polyallylether-
nitrile resins, and ultra-high molecular weight polyethylene
resins. A metal such as stainless steel may be also used. The
remaining part of the holder 22 other than the part which slides
30 on the measuring vessel 21 may be made of another resin. The

part sliding on the measuring vessel 21 and the other part can be made of different materials by, for example, utilizing a laminate structure. The holder 22 is not necessarily a rectangular parallelepiped as long as it has a flat face which
5 can be in contact with the measuring vessel 21. The holder 22 has a through hole 22a extending from the face in contact with the measuring vessel 21 to the top face thereof. The through hole 22a preferably has the same cross-section as the space 21a of the measuring vessel 21 but may have a different cross-
10 section from that of the space 21a. The lower opening of the through hole 22a has an unchamfered, right-angle edge.

[0032]

The holder 22 is restrained from moving horizontally and supported so as not to tilt by a guide (not shown). The holder
15 22 has its top face pressed downward by two springs 23 as pressing means having upper parts fixed to a filling nozzle 16 and a dummy nozzle 16a, respectively. The bottom face of the holder 22 is in contact with the top face 21d of the measuring vessel 21 such that it pressures on the top face 21d. The two springs 23 are
20 disposed in the traveling direction of the measuring vessel 21. Since the holder 22 is pressed by the two springs 23, the holder 22 can press the measuring vessel 21 uniformly even when the measuring vessel 21 is moved horizontally and the measuring vessel 21 can be moved smoothly. The springs may be coil springs,
25 plate springs or other types of springs. The number of the springs is not limited to two and may be one or several. Preferably, plural of springs are disposed in the traveling direction of the measuring vessel 21. The upper parts of the springs may be fixed to a fixed beam or the like, not to the
30 filling nozzle 16 and the dummy nozzle 16a. The pressure of

the holder 22 on the measuring vessel 21 caused by the springs 23 is within such a range that a spherical adsorptive carbon granule is not crushed even if it is caught between the measuring vessel 21 and the holder 22. Therefore, even if the spherical
5 adsorptive carbon granule is caught between the measuring vessel 21 and the holder 22, the granule cannot be crushed to generate a large amount of fine granules. Any pressing means other than springs may be used. For example, the holder 22 may be pressed by fluidic pressure such as hydraulic or pneumatic
10 pressure, magnetic force, or elastic force other than spring force. The holder 22 may press the measuring vessel 21 with its own weight or may press with its own weight and an additional weight of a weight attached thereto.

[0033]

15 A shutter 24 is placed below the measuring vessel 21 with a designated gap d therebetween. The shutter 24 is a metallic, rectangular parallelepiped having a top face parallel to the bottom face 21e of the measuring vessel 21. The shutter 24 is preferably made of stainless steel but may be made of another
20 metal or a hard material such as an engineering plastic resin. The shutter 24 is not necessarily a rectangular parallelepiped as long as it has a top face parallel to the bottom face 21e of the measuring vessel 21. The shutter 24 has a through hole 24a extending from the face facing the measuring vessel 21 to
25 the bottom face thereof. The through hole 24a preferably has the same cross-section as the space 21a of the measuring vessel 21 but may have a different cross-section from that of the space 21a when its cross-section is larger than that of the space 21a. The upper opening of the through hole 24a has an unchamfered,
30 right-angle edge.

[0034]

The shutter 24 is fixedly supported with a gap d between its top face and the bottom face 21e of the measuring vessel 21. The width of the gap d has to be smaller than any of the diameters of the granular object (spherical adsorptive carbon, in this embodiment) to be measured and greater than the diameter of fine granules not to be measured. Then, since the granules of the granular object to be measured are not caught in the gap d and since fine granules are not slid in the gap d, measurement can be made without damaging the measuring device and fine granules can be discharged through the gap d between the measuring vessel 21 and the shutter 24.

[0035]

The operation of the measuring device is next described with reference to the cross-sectional view of FIG. 2. Here, a measuring device for measuring spherical adsorptive carbon with a diameter between 0.05 and 1 mm is described as an example. As shown in FIG. 2A, when the measuring vessel 21 is in such a position that the space 21a is in communication with the through hole 22a, spherical adsorptive carbon is supplied from the filling nozzle 16 the end of which is positioned above or in the through hole 22a. The spherical adsorptive carbon passes through the through hole 22a and enters the space 21a of the measuring vessel 21. Since the lower opening of the space 21a is closed by the top face of the shutter 24, the spherical adsorptive carbon is heaped up in the space 21a. The spherical adsorptive carbon is supplied from the filling nozzle 16 in an amount greater than the capacity of the space 21a, and the spherical adsorptive carbon which cannot enter the space 21a is heaped up in the through hole 22a.

[0036]

As shown in FIG. 2B, when a small amount of spherical adsorptive carbon is heaped up in the through hole 22a, the measuring vessel 21 starts being moved horizontally. In FIG. 5 2B, the measuring vessel 21a is moved in an arrow direction. Then, the upper opening of the space 21a is gradually closed by the holder 22. The spherical adsorptive carbon in the through hole 22a is left behind in the through hole 22a, and eventually remains in the through hole 22a when the lower 10 opening of the through hole 22a is closed by the top face 21d of the measuring vessel 21. The spherical adsorptive carbon may continue to be supplied from the filling nozzle 16 or may be stopped by a valve or the like after the measuring vessel 21 has started being moved.

15 [0037]

The space 21a is closed as the lower opening is closed by the top face of the shutter 24 and the upper opening is closed by the bottom face of the shutter 22, and the spherical adsorptive carbon in the space 21a is moved together with the measuring 20 vessel.

[0038]

When the measuring vessel 21 is moved until the lower opening of the space 21a overlaps the upper opening of the through hole 24a of the shutter 24 as shown in FIG. 2C, the spherical 25 adsorptive carbon in the space 21a starts falling through the through hole 24a. The lower opening of the through hole 24a is communicated with a chute pipe (not shown), and the spherical adsorptive carbon is transported for the next process.

[0039]

30 When the lower opening of the space 21a completely overlaps

the through hole 24a, all the spherical adsorptive carbon in the space 21a falls. After that, the measuring vessel 21 is moved in the opposite direction, and the lower opening of the space 21a is closed by the top face of the shutter 24 and the upper opening of the space 21a overlaps the lower opening of the through hole 22a of the holder 22. Then, the spherical adsorptive carbon remaining in the through hole 22a falls into the space 21a and more spherical adsorptive carbon is supplied from the filling nozzle 16 into the space 21a. Every time the above operation is repeated, spherical adsorptive carbon in an amount corresponding to the capacity of the space 21a of the measuring vessel 21 is measured and transported for the next process. Since the measurement by the measuring vessel 21 is performed 30 to 50 times per minute, the measuring vessel 21 is moved very quickly.

[0040]

Since the holder 22 is pressed toward the measuring vessel 21 by the springs 23, the holder 22 and the measuring vessel 21 are reliably kept in close contact with each other during the above operation. In case that there is a gap between the top face 21d of the measuring vessel and the bottom face of the holder 22 where the spherical adsorptive carbon granules are heaped up over the capacity of the space 21a and the measuring vessel is then moved, the spherical adsorptive carbon granules existing over the capacity of the space 21a may be left in the thorough hole 22a of the holder and may enter the gap. The spherical adsorptive carbon granule having entered the gap is rubbed against the top face 21d of the measuring vessel 21 and the bottom face of the holder 22 between them. Since spherical adsorptive carbon is hard, the surfaces of the top face 21d of

the measuring vessel 21 and the bottom face of the holder 22 are rubbed and scratched by the granule of spherical adsorptive carbon. However, since the holder 22 and the measuring vessel 21 are reliably kept in close contact with each other, no granule of spherical adsorptive carbon can be caught between them and the holder 22 and the measuring vessel 21 are not damaged.

[0041]

Also, since the upper opening of the space 21a has an unchamfered, right-angle edge and the lower opening of the through hole 22a has an unchamfered, right-angle edge, a granule of spherical adsorptive carbon is less likely to be caught between the top face 21d of the measuring vessel 22 and the bottom face of the holder 22. When the edges are chamfered, a granule of spherical adsorptive carbon is caught between the chamfered edges. Then, when the measuring vessel 22 is moved, the granule of spherical adsorptive carbon presses the chamfers. As a result, a force is generated in such a direction as to move the measuring vessel 21 downward or to move the holder 22 upward, and the granule of spherical adsorptive carbon is more likely to be caught between them.

[0042]

Also, since the top face 21d is made of an abrasion resistant material, the measuring vessel 21 is not easily worn and has a long service life even though it is slid with the holder pressed against it.

[0043]

Since the holder 22 is made of an acetal resin, polyether-ether-ketone or the like, the friction between the holder 22 and the measuring vessel 21 is so small that the measuring vessel 21 can be easily reciprocated horizontally.

Also, since such a material is soft, the holder 22 can be kept in close contact with the measuring vessel 21. In addition, since the holder 22 is made of a soft material, the measuring vessel 21 is not worn even through the measuring vessel 21 slides
5 on the holder 22. Since the holder 22 is made of an acetal resin, polyether-ether-ketone or the like, it is easy to be formed and to be replaced easily when worn out.

[0044]

Since a granule of spherical adsorptive carbon collides with
10 each other or is rubbed against the outer walls and so on and their surfaces are scraped off when they are conveyed in the space 21a of the measuring vessel 21 or supplied into the space 21a, fine granules of adsorptive carbon are mixed in the spherical adsorptive carbon. The fine granules enter even the
15 smallest gaps and scratch the surfaces. Fine granules having entered the space 21a of the measuring vessel 21 fall through the gaps among the granules of spherical adsorptive carbon and deposit on the top face of the shutter 24. Then, when the measuring vessel 21 slides along the shutter 24, the fine
20 granules may enter the gap between the bottom face 21e of the measuring vessel 21 and the top face of the shutter 24 and damage their surfaces. However, when the width of the gap d between them is smaller than any of the diameters of spherical adsorptive carbon granules to be measured and greater than the
25 diameter of fine granules not to be measured, the fine granules deposited in the space 21a are passed through the gap d and separated and removed from the spherical adsorptive carbon. Here, "any of the diameters of spherical adsorptive carbon granules to be measured" means the diameter of the smallest
30 particles in the multiplicity of granules to be measured. This

is easy to understand in this embodiment since the granules are spherical. In general, it means the smallest diameter of the granules. For example, in the case of elliptical granules, it means the minor axis thereof. Since the spherical adsorptive carbon has a diameter between 0.05 and 1 mm in this embodiment as described before, the width of the gap d is not greater than 0.05 mm, preferably not greater than 0.04 mm, more preferably not greater than 0.035 mm. The lower limit of the width of the gap d depends on the granular object to be measured. In the case of spherical adsorptive carbon, it is 0.01 mm or greater, preferably 0.02 mm or greater.

[0045]

Moreover, since the bottom face 21e of the measuring vessel 21 is formed by the abrasion resistant material 21c, the measuring vessel 21 is less likely to be damaged even if fine particles collide with the bottom face 21e as the measuring vessel 21 is reciprocated.

[0046]

A packaging apparatus according to a second embodiment of the present invention is described with reference to the schematic view of FIG. 3. FIG. 3 shows an apparatus for packaging spherical adsorptive carbon provided with a measuring device 20 according to the first embodiment of the present invention.

[0047]

A hopper 10 is disposed above the measuring device 20. The hopper 10 is a container having a wide upper opening and narrowing gradually toward the lower end. The lower end of the hopper 10 is opened and communicated with a filling nozzle 16. The hopper has a heater 12, and the spherical adsorptive carbon in the hopper is heated at 55 to 80°C. Alternatively, hot air

from a heater may be passed through the hopper to heat the spherical adsorptive carbon at 60 to 80°C.

[0048]

The filling nozzle 16 under the hopper 10 is a thin pipe so
5 that the spherical adsorptive carbon in the hopper can be discharged little by little. The lower end of the filling nozzle 16 is located and opens in the through hole 22a of the holder 22.

[0049]

10 As described before, the holder 22 is combined with a measuring vessel 21 reciprocable horizontally under the holder 22, a shutter 24 placed under the measuring vessel 21, and springs 23 for pressing the holder 22 against the measuring vessel 21 under the holder 22 to constitute the measuring device 20.

15 [0050]

The shutter 24 of the measuring device 20 has a through hole 24a with a lower opening communicated with a chute pipe 31. The chute pipe 31 has a funnel-like upper portion with a wide opening for receiving the spherical adsorptive carbon falling through
20 the through hole 24a of the shutter 24 and a narrow pipe-like lower portion opened at the lower end.

[0051]

A tubular tube 90 for packaging the spherical adsorptive carbon is placed below the chute pipe 31 with its opening facing
25 upward. The tube 90 is produced by forming a flat tape-like sheet into a tubular shape below the chute pipe 31. The tube 90 is transversely sealed as described later to form a bag sealed at the bottom.

[0052]

30 A sealing device 40 is disposed below the opening of the chute

pipe 31 for sealing the tube 90 transversely. The sealing device 40 heat-seals the tube 90 containing spherical adsorptive carbon transversely at a prescribed length by pinching the tube 90 with top seal bars 41. The top seal bars
5 41, which are two metal blocks with flat ends, are heated by a heater and pinch the tube 90 from both sides to heat-seal the tube 90. While pinching the tube 90 the top seal bars 41 pull down the tube 90 to place the sealed part at the position of the bottom of the next bag for receiving spherical adsorptive
10 carbon.

[0053]

In synchronization with the motion of the top seal bars 41 of the sealing device 40, a pinching device 50 located right below the sealing device operates. The pinching device pinches
15 the part of the tube 90 to be sealed by the sealing device 40 with air expel guides 51 to expel the air in the tube 90 in order to prevent the produced package from expanding with an increase in temperature. Each of the air expel guides 51 has a bulged upper portion and a recessed lower portion. Therefore, the
20 spherical adsorptive carbon is placed at the bottom of the bag formed from the tube 90, and an upper part of the tube 90 is pressed flat so that nothing can be contained in the upper part of the bag. The top seal bars 41 and the air expel guides 51 are arranged so as to pinch the tube 90 in the same direction.

25 [0054]

A cutting device 60 is disposed below the pinching device 50 for cutting the tube 90 containing spherical adsorptive carbon at the sealed parts into packet 91 or package 92 consisting of a plurality of packets 91. The cutting device 60 has two blades
30 which pinch and cut the tube 90. The package 92 of a plurality

of packets 91 containing spherical adsorptive carbon and joined end to end may be perforated at the sealed parts left uncut so that packets 91 can be easily separated by hand. Therefore, the cutting device 60 may also have blades each of which has
5 an edge with notches at equal intervals and which are operated at different timing from the cutting blades.

[0055]

A receiving table 61 is located below the cutting device 60. The receiving table 61 is a tilted plate that allows the cut
10 package 92 to fall obliquely to reduce the impact of the fall. The receiving table 61 has a shock absorbing roller 62 for further reducing the falling speed of the packages 92. The shock absorbing roller 62 is located in such a position that the package 92 passes between two cylindrical rollers of the
15 shock absorbing roller 62 while sliding down on the receiving table 61. Since the package 92 rotate the rollers when passing therebetween, the falling speed of the package 92 is reduced. The shock absorbing roller 62 may have only one roller. Another means for reducing the falling speed of the package 92 may be
20 provided instead of the shock absorbing roller 62. For example, some means for increasing friction may be provided on the receiving table 61.

[0056]

A cooling device 70 is disposed downstream of the receiving
25 table 61. The cooling device 70 has a conveyor 71 and supports 72 for supporting the package 92 in an obliquely upstanding position arranged on the conveyor 71 and moving together with the conveyor 71. The supports 72 are plates or rods obliquely extending from the conveyor 71. The supports 72 support the
30 package 92 such that the short sides of the package 92 are

perpendicular to the transporting direction. Then, a larger number of packages 92 can be supported on the conveyor 71 with the same length. At the end opposite the receiving table 61 where the conveyor 71 turns around, the package 92 falls by gravity. The package 92 falls into a container for packing the package 92, and the package 92 is packed and shipped.

[0057]

The method of producing the package 92 of spherical adsorptive carbon is next described with reference to FIG. 3. Spherical adsorptive carbon is supplied into the hopper 10 through the upper opening thereof and temporally stored in the hopper 10. The spherical adsorptive carbon is heated at 60 to 80°C by the heater 12 while being stored in the hopper 10. This is to package the spherical adsorptive carbon at the possible highest temperature in order to prevent the contents in the package 92 from expanding to form voids in the packets 91 in which they can move with an increase in temperature after packaging.

[0058]

The spherical adsorptive carbon gradually descends in the hopper 10 and flows into the filling nozzle 16 from the lower end of the hopper 10. The inside diameter of the filling nozzle 16 is so selected that an appropriate amount of spherical adsorptive carbon can be passed through the filling nozzle 16 and discharged from the hopper 10. A valve may be provided in the filling nozzle 16 for controlling the amount of spherical adsorptive carbon to be discharged.

[0059]

As described before, the spherical adsorptive carbon is supplied from the filling nozzle 16 to the measuring vessel 21 through the holder 22, measured into a prescribed amount by the

measuring vessel 21 and discharged into the chute pipe 31 through the shutter 24.

[0060]

At the same time when the spherical adsorptive carbon is supplied to the hopper 10, a sheet wound in a roll is pulled out at a prescribed speed and formed into a tubular shape in the vicinity of the lower end of the chute pipe 31. The overlapped portions of the sheet are heat-sealed to form the tube 90. The tube 90 is sealed transversely at a prescribed position by the sealing device 40 as described later. The tube 90 is formed into a bag sealed at the bottom and placed with its opening facing the lower opening of the chute pipe 31.

[0061]

The spherical adsorptive carbon measured by the measuring device 20 is poured into the bag-shaped part of the tube 90 through the chute pipe 31 and is heaped up in the lower part of the bag-shaped part. Then, the air expel guides 51 of the pinching device 50 pinch the bag-shaped part from both sides to expel the air therein. Almost as soon as the pinching device 50 expels the air, the tube 90 is sealed transversely by the sealing device 40 at a position immediately above the part from which air has been expelled by the pinching device 50. The tube 90 is made of a multi-layer film having an inner layer of a heat-sealable plastic film and can be sealed when pinched by heated top seal bars 41. The top seal bars 41 may seal the tube 90 by means other than heat sealing, such as ultrasonic sealing.

[0062]

The top seal bars 41 move down a distance equal to the length of the bag for the spherical adsorptive carbon while pinching the tube 90. By this movement, the sealed part made to close

the bag containing spherical adsorptive carbon becomes the bottom of the next bag-shaped part of the tube 90.

[0063]

The packets 91 containing spherical adsorptive carbon and sealed transversely are cut at the sealed parts into for example
5 each packet or a package of three packets by the cutting device 60. When a package of a plurality of packets is cut off, the package may be perforated at the sealed parts between the packets by being pinched between blades each having an edge with
10 notches at equal intervals so that the packets can be easily separated by hand.

[0064]

The package 92 cut by the cutting device 60 slides down on the receiving table 61, is reduced in falling speed by the shock
15 absorbing roller 62 and falls down onto the cooling device 70. Since the package 92 falls onto the cooling device 70 at a low speed, the seals at the bottoms of the package 92 is not damaged by the impact of the fall. The package 92 fed onto the cooling device 70 are held in an obliquely upstanding position by the
20 supports 72 and transported on the conveyor 71 of the cooling device for one to five minutes. The package 92 may be transported on the conveyor 71 at room temperature or exposed to cool air while being transported. During this time, the spherical adsorptive carbon heated to 60 to 80°C in the hopper
25 10 and still keeping the temperature is cooled to almost room temperature. When cooled, the package shrinks and the spherical adsorptive carbon cannot move any more in the packets 91.

[0065]

30 When the package 92 is transported to an end of the conveyer

71, the conveyor 71 turns downward and the package 92 falls by gravity. A packing box is placed at the position where the package 92 falls. When a predetermined number of packages 92 are put in the box, the box is carried away.

5 [0066]

Here, spherical adsorptive carbon to be measured by the measuring device according to the first embodiment of the present invention or packaged by the packaging apparatus according to the second embodiment of the present invention is
10 described. Spherical adsorptive carbon is a porous spherical carbon material and has a diameter between 0.05 and 1 mm. Spherical adsorptive carbon with a particle size between 0.2 and 0.5 mm has a hardness between 600 and 1500 mN per granule with a high incidence between 800 and 1300 mN per granule and
15 a mode of approximately 1000 mN per granule as measured with a powder characteristic measuring meter manufactured by Tsutsui Rikagaku Kikai Co., Ltd (breaking value in a breakdown test on spherical adsorptive carbon). In general, medicine with a similar granule size range has a hardness of approximately 200
20 mN per granule or less as measured by the same method. The measuring device according to the present invention is suitable to measure spherical adsorptive carbon having such a high hardness since spherical adsorptive carbon granules cannot be caught between the measuring vessel 21 and the holder 22 and
25 between the measuring vessel 21 and the shutter 24 to cause damage of the measuring vessel 21, the holder 22 and the shutter 24.

[0067]

Although spherical adsorptive carbon is herein taken as the
30 granular object to be measured and packaged, the measuring

device, the packaging apparatus and the package production method according to the present invention are applicable to other granular object.

5 Brief Description of Drawings

[0068]

FIG. 1 is a cross-sectional view, illustrating a measuring device according to a first embodiment of the present invention.

FIG. 2 is a cross-sectional view, illustrating the operation
10 of the measuring device according to the first embodiment of the present invention.

FIG. 3 is a schematic view, illustrating a packaging apparatus according to a second embodiment of the present invention.

FIG. 4 is a cross-sectional view, illustrating a measuring
15 device according to a conventional art.

Description of Reference Numerals and Symbols

[0069]

- 16: filling nozzle
- 20: measuring device
- 21: measuring vessel
- 21a: space
- 21b, c: abrasion resistant material
- 22: holder
- 23: spring (pressing means)
- 24: shutter
- 31: chute pipe
- 40: sealing device
- 50: pinching device
- 60: cutting device

61: receiving table
62: shock absorbing roller
d: gap

CLAIMS

1. A device for measuring a hard granular object, comprising:
 - 5 a measuring vessel having a first face, a second face parallel to the first face, and a space formed between the first and second faces for receiving hard granular object supplied from the first face side;
 - a holder located on the side of the first face, having a through
10 hole communicable with the space, and slidable along the first face;
 - a shutter located on the side of the second face, having a through hole communicable with the space, and movable parallel to the second face; and
 - 15 a pressing means for pressing the holder toward the measuring vessel.
2. The device for measuring a hard granular object of Claim 1, wherein there is kept a designated gap between the second
20 face and the shutter.
3. The device for measuring a hard granular object of Claim 1 or 2, wherein the holder is pressed toward the measuring vessel with a force smaller than that required to crush the hard
25 granular object.
4. The device for measuring a hard granular object of any one of Claims 1 to 3, wherein a part of the first face which slides on the holder is made of an abrasion resistant material.

5. The device for measuring a hard granular object of any one of Claims 1 to 4, wherein a part of the holder which slides on the measuring vessel is made of an acetal resin or polyether-ether-ketone.

5

6. The device for measuring a hard granular object of any one of Claims 1 to 5, wherein a part of the second face facing the shutter is made of an abrasion resistant material.

10 7. The device for measuring a hard granular object of any one of Claims 1 to 6, wherein the space of the measuring vessel for receiving the hard granular object has an opening with its unchamfered edge in the first face.

15 8. The device for measuring a hard granular object of any one of Claims 1 to 7, wherein the space of the measuring vessel for receiving the hard granular object has an opening with its unchamfered edge in the second face.

20 9. A method for measuring a hard granular object comprising the steps of:

charging the space of the measuring vessel with a hard granular object to be measured from a holder of the measuring vessel according to any one of Claims 1 to 8;

25 closing the openings of the space, in the first and second faces of the measuring vessel, filled with the hard granular object; and

discharging the hard granular object from the space of the measuring vessel.

ABSTRACT

The present invention provides a device for measuring a hard granular object having a measuring vessel, a holder and a shutter which cannot be damaged by a granule caught between them
5 when used to measure a granular object with high hardness and a method for measuring a hard granular object therewith. The present invention also provides a device and a method for removing fine granules from a hard granular object such as spherical adsorptive carbon containing fine granules and
10 measuring the hard granular object.

A device 20 for measuring a hard granular object comprises: a measuring vessel 21 having a first face 21d, a second face 21e parallel to the first face 21d, and a space 21a formed between the first face 21d and the second face 21e for receiving a hard
15 granular object supplied from the first face 21d side; a holder 22 located on the side of the first face 21d, having a through hole 22a communicable with the space 21a, and slidable along the first face 21d; a shutter 24 located on the side of the second face 21e, having a through hole 24a communicable with the space
20 21a, and movable parallel to the second face 21e; and a pressing means 23 for pressing the holder 22 toward the measuring vessel 21.

1/4

FIG. 1A


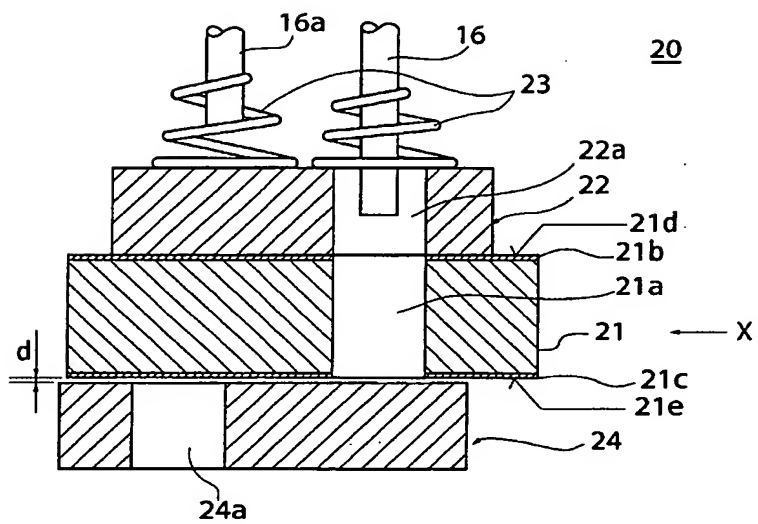


FIG. 1B

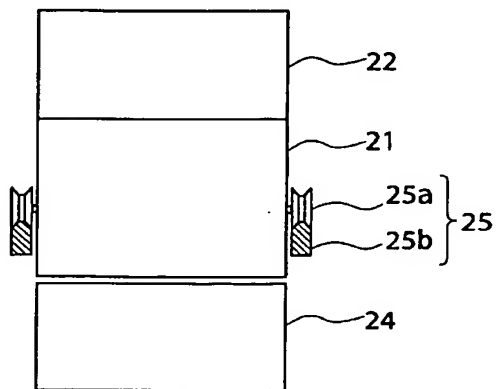

View taken in direction of arrow X

FIG. 2A

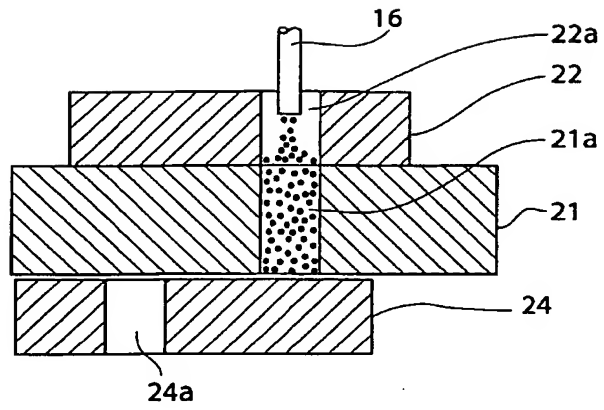


FIG. 2B

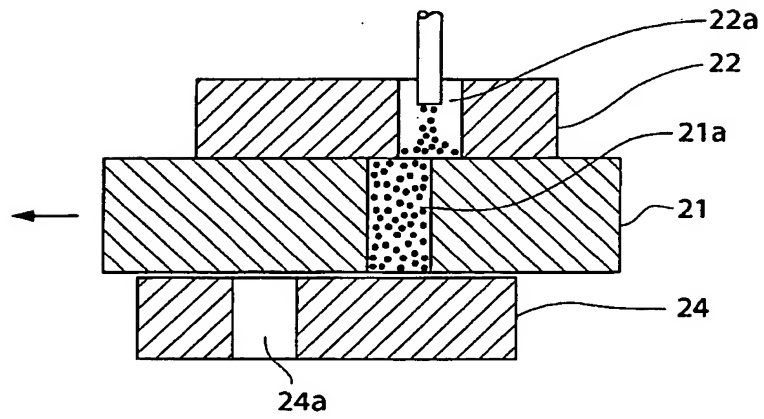


FIG. 2C


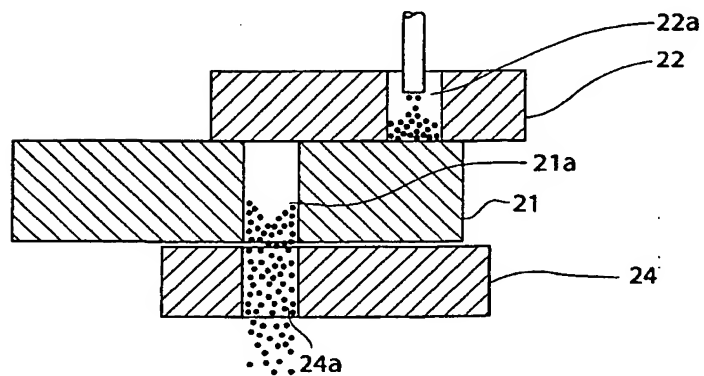


FIG. 3



4/4

FIG. 4

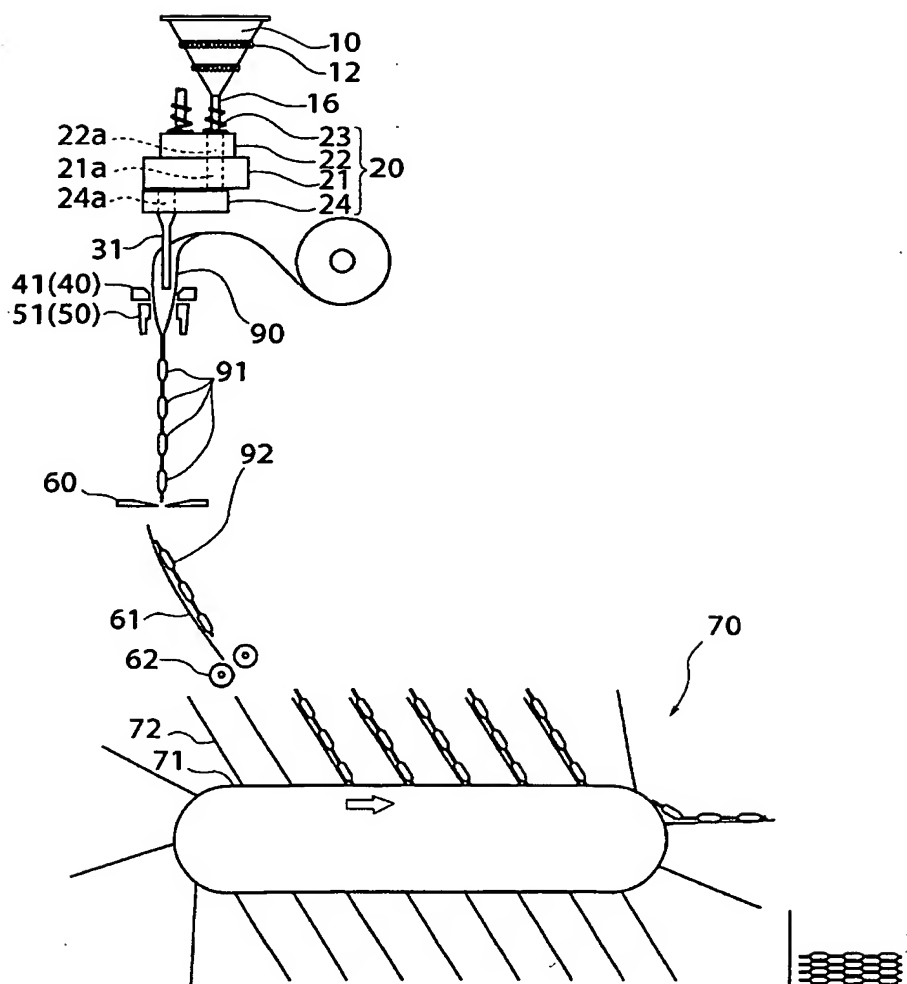